

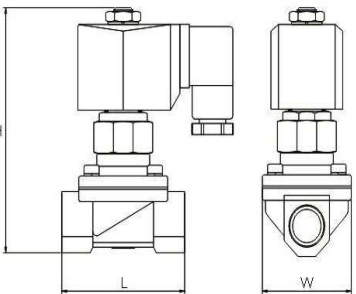


| | MODEL | Orifice(mm) | Pipe Thread | Working pressure |
|---|---------|-------------|-------------|------------------|
|  | BD1010H | 10MM | G3/8" | 0-8 Bar |
| | BD1015H | | G1/2" | |

| | MODEL | Orifice(mm) | Pipe Thread | Working pressure |
|--|-----------|-------------|-------------|------------------|
|  | 2N150-15H | 15 | G1/2" | 0-8 Bar |
| | 2N200-20H | 20 | G3/4" | |
| | 2N250-25H | 25 | G1" | |

| | Model | L | H | W |
|---|----------|----|-----|----|
|  | BD1010H | 50 | 110 | 41 |
| | BD1015H | 50 | 110 | 41 |
| | 2N150-15 | 65 | 135 | 47 |
| | 2N200-20 | 72 | 142 | 54 |
| | 2N250-25 | 90 | 150 | 70 |

www.tgelectronics.no

TG ELECTRONICS

| Environment Temp. | Medium Temp. | Seals material | CV value | Body material | Voltage |
|-------------------|--------------|----------------|----------|---------------|---|
| -10~50°C | -10~+150°C | VITON | 1,63 | Brass | 220VAC 110VAC 24VDC 12VDC make Other voltage as requested |

| Environment Temp. | Medium Temp. | Seals material | CV value | Body material | Voltage |
|-------------------|--------------|----------------|----------|---------------|---|
| -10~50°C | -10~+150°C | VITON | 4,6 | Brass | 220VAC 110VAC 24VDC 12VDC make Other voltage as requested |
| | | | 8,5 | | |
| | | | 12 | | |